—— Assembly and Safe Use Manual ——

BBSBHPLATE

Premium Molded Home Base Kit

Customer Service
(800) 247-7668

PARTS LIST					
Item	**Qty**	**Description**	**Item**	**Qty**	**Description**
A	1	Molded Home Plate	D	1	Installation Tool
B	1	Ground Anchor	E	TBD	Quick Dry Concrete (Customer Supplied)
C	1	Orange Anchor Plug			

- Inspect all contents prior to installation. Report any missing parts to dealer immediately.
- Read all instructions before proceeding.
- Never substitute locally sourced components for missing, lost or damaged factory components.

1 See Figure 1 to properly position the *Molded Home Plate* (A).

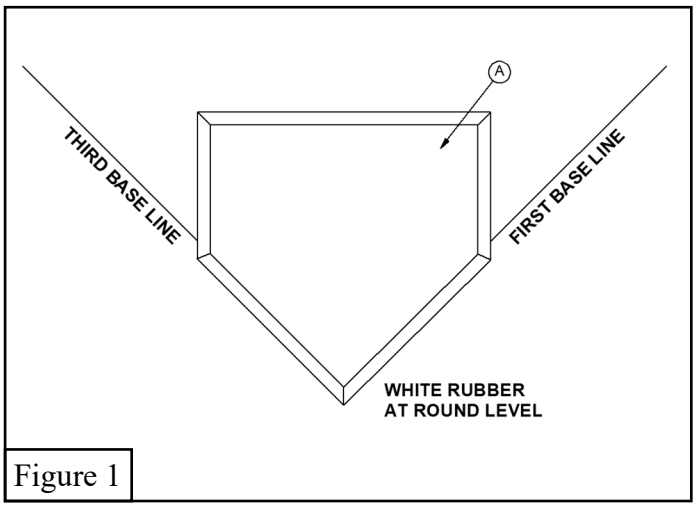


Figure 1

2 Excavate a 12" x 12" x 9 1/2" deep hole that will be used as a footing for the *Ground Anchor* (B). See Figure 2.

3. Cap the bottom of the *Ground Anchor* (B) with duct tape to keep concrete from entering the *Ground Anchor* (B).

4. Position the *Ground Anchor* (B) making sure that when the *Molded Home Plate* (A) is inserted that it is properly located. Make sure that the top of the *Ground Anchor* (B) is approximately 1 1/2" below the playing surface at home plate. Use the *Installation Tool* (D) inserted into the *Ground Anchor* (B) to insure that the Ground Anchor is plumb. See Figure 2.

5. Mix approximately 2/3 cubic foot of *Quick Dry Concrete* (E) and pour into the excavated hole making sure that the top of the concrete is at approximately 3" below the final playing surface. Double check the position of the *Ground Anchor* (B) to make sure that the *Molded Base* (A) will be in the proper location when the concrete cures. See Figure 2.

6. Allow the *Quick Dry Concrete* (E) to cure for 48 hours. Remove the *Installation Tool* (D) and install the *Orange Anchor Plug* (C) into the *Ground Anchor* (B). Fill the void above the concrete with dirt to the same level as the playing field.

7. To install the *Molded Home Plate* (A) into the *Ground Anchor* (B) remove the *Orange Anchor Plug* (C) and rearrange the infield soil so that the *Molded Home Plate* (A) can be installed with the top surface flush with the playing surface. Brush additional infield soil around the plate for a finished look. See Figure 3.

8. The *Molded Home Plate* (A) can be removed at any time by rearranging the soil around the home plate and installing the *Orange Anchor Plug* (C).

   NOTE: Never drag the field without the home plate and bases plugs being installed in the *Ground Anchors* (B).

Figure 2

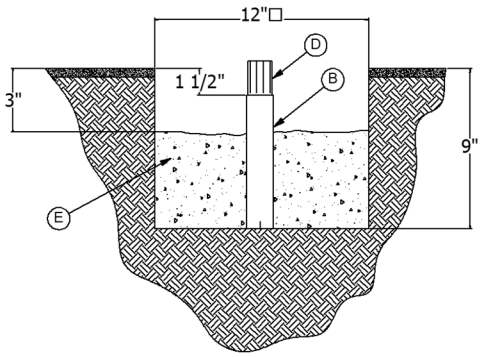


Figure 3

