



**--- COACHES STAND FOR BATTING CAGES ---
BGLC-75CSTND**



Call Jaypro Sports Equipment at 1-800-243-0533 during regular business hours for technical support.

www.jaypro.com

IMPORTANT NOTICE:

1. BEFORE EACH USE CHECK EQUIPMENT FOR PROPER CONNECTING HARDWARE AND STRUCTURAL INTEGRITY. REPLACE DAMAGED OR MISSING HARDWARE IMMEDIATELY.
2. SECURELY TIGHTEN ALL NUTS AND BOLTS.
3. **NEVER** ALLOW ANYONE TO RIDE ON BATTING CAGE DURING TRANSPORT.
4. USE OF THIS EQUIPMENT OTHER THAN INTENDED, MAY BE HAZARDOUS.
5. ALTERATION OR MODIFICATION OF THIS EQUIPMENT MAY BE HAZARDOUS AND RESULT IN INJURY. FOR REPAIR OR REPLACEMENT, CONTACT YOUR DEALER OR JAYPRO SPORTS.
6. DO NOT EXCEED MORE THEN 3 MPH WHEN TRANSPORTING THE BATTING CAGE WITH TOW KIT.

LIST OF RECOMMENDED TOOLS & SUPPLIES

ITEM	DESCRIPTION
1	POWER DRILL WITH 3/16" OR 9/64" DRILL BIT & PHILLIPS BIT
2	BOX WRENCHES, ADJUSTABLE WRENCHES, OR SOCKET SET
3	3/16" & 7/32" ALLEN WRENCH
4	RUBBER MALLET

**COACHES STAND FOR PORTABLE BATTING CAGE
LIST OF MATERIALS**


ITEM	QTY	DESCRIPTION
1	2	9/16" x 31" Shaft Stand
2	2	Coach Stand Weldment
3	4	1/8" OD x 1-1/2" Cotter
4	4	9/16" Flat Washer
5	16	5/16-18 Nylon Lock Nut
6	4	9 1/2" X 1-1/2" X 24" Plank
7	16	5/16" Bolt Clip
8	16	5/16-18 X 3 Carriage Bolt
9	8	9 1/2" Aluminum Seat Plank End Cap
10	16	#8 x 1/2" Pan Head Philip Screw Self Drill
11	4	Plastic End Plug
12	2	3/8" Bungee Cord
13	2	3/8" J-Hook w/ Clamping Wire

ASSEMBLY INSTRUCTIONS

- Unpack all parts and check against parts list to ensure that all have been included.
- Inspect all parts for damage. Report any damages to the trucking company.
- Select a large clear flat area to assemble the cage.


BGLC-75STND QUICK REFERENCE



(SEE EXPLODED VIEWS OF DIFFERENT SECTIONS FOR HARDWARE CALLOUTS)

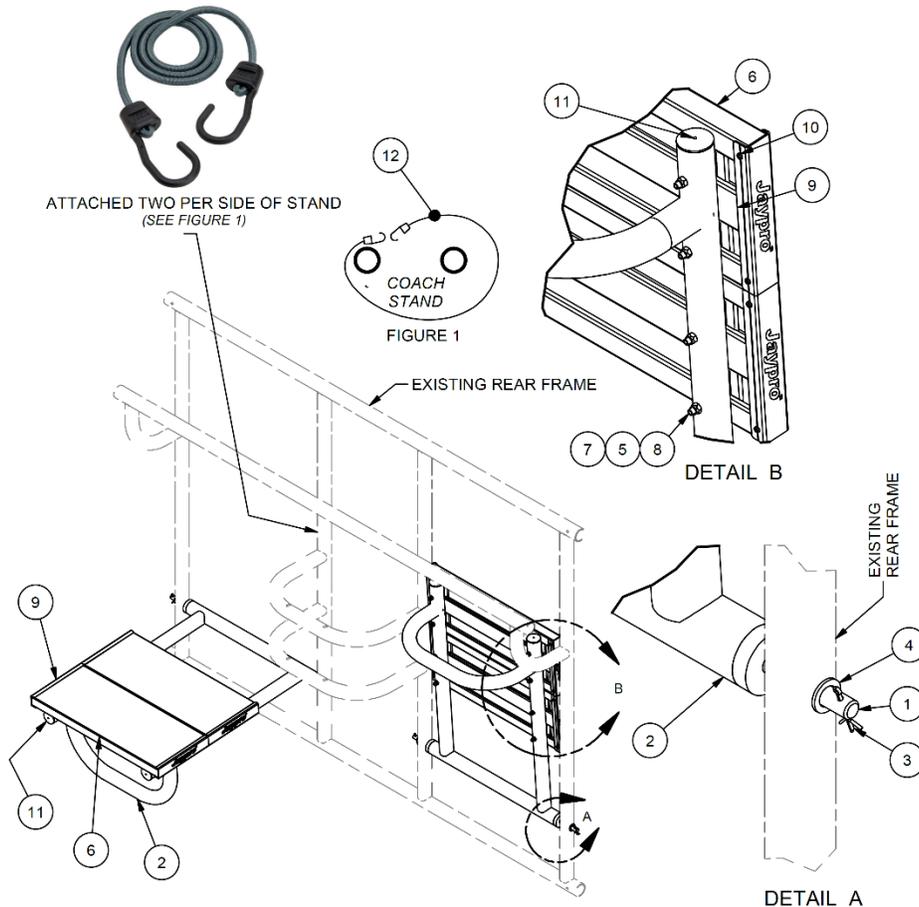

Coaches stand:

ITEM	QTY	PART #	DESCRIPTION
1	2	BGLC-5	9/16" x 31" SHAFT STAND
2	2	BGLC-N	COACH STAND WELDMNT
3	4	HM6344	1/8" OD x 1 1/2" COTTER
4	4	HW5037	9/16" FLAT WASHER, ZP
5	16	HN261	5/16-18 UNC-Nylon Lock Nut-ZP-GrNC
6	4	PLANK-A	9 1/2" x 1 1/2" x 24" PLANK
7	16	AR5044	5/16" BOLT CLIP
8	16	HB5030	5/16-18 x 3 CARRIAGE BOLT ZP
9	8	AR5045A	9 1/2" ALUMINUM SEAT PLANK END CAP
10	16	HS5035	#8 x 1/2" PAN HEAD PHILIP SCREW SELF DRILL, ZP
11	4	EP0019	PLASTIC END PLUG 77-8
12	2	RR5035	48" BUNGIE CORDS W/ HOOKS STL CORE

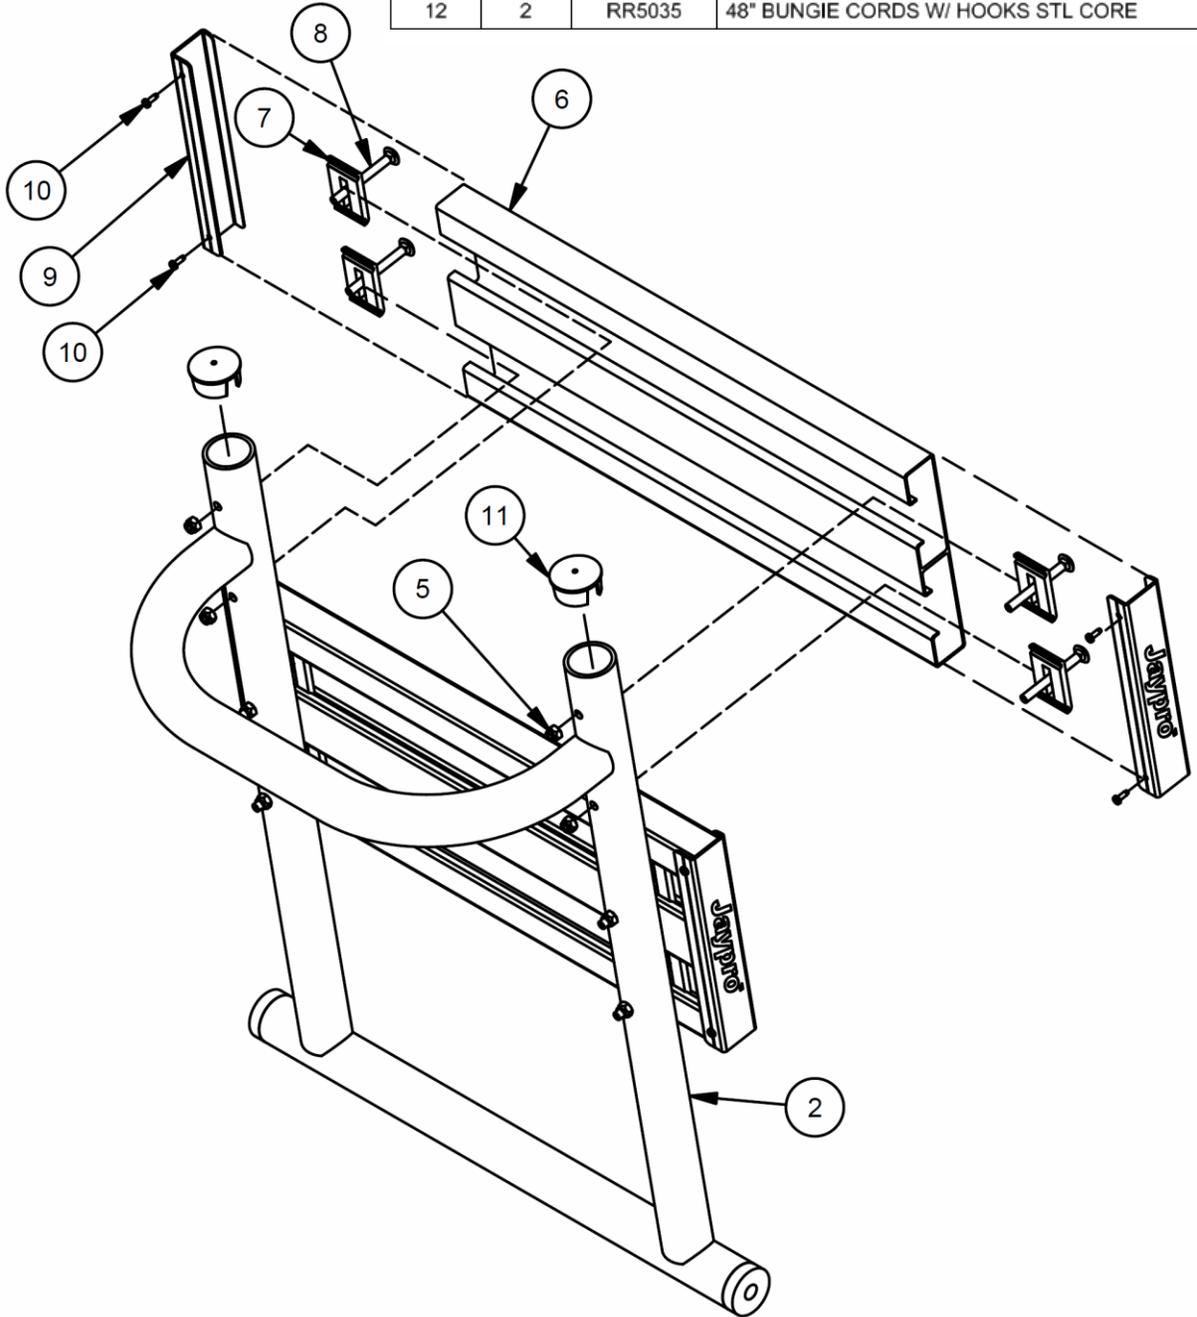

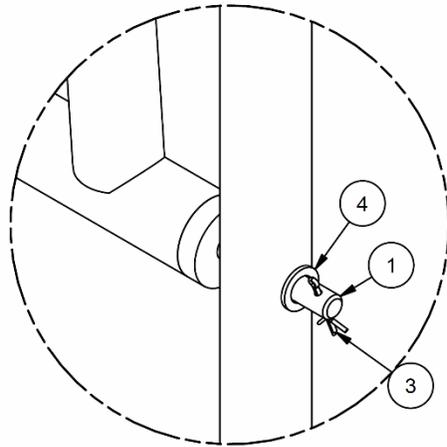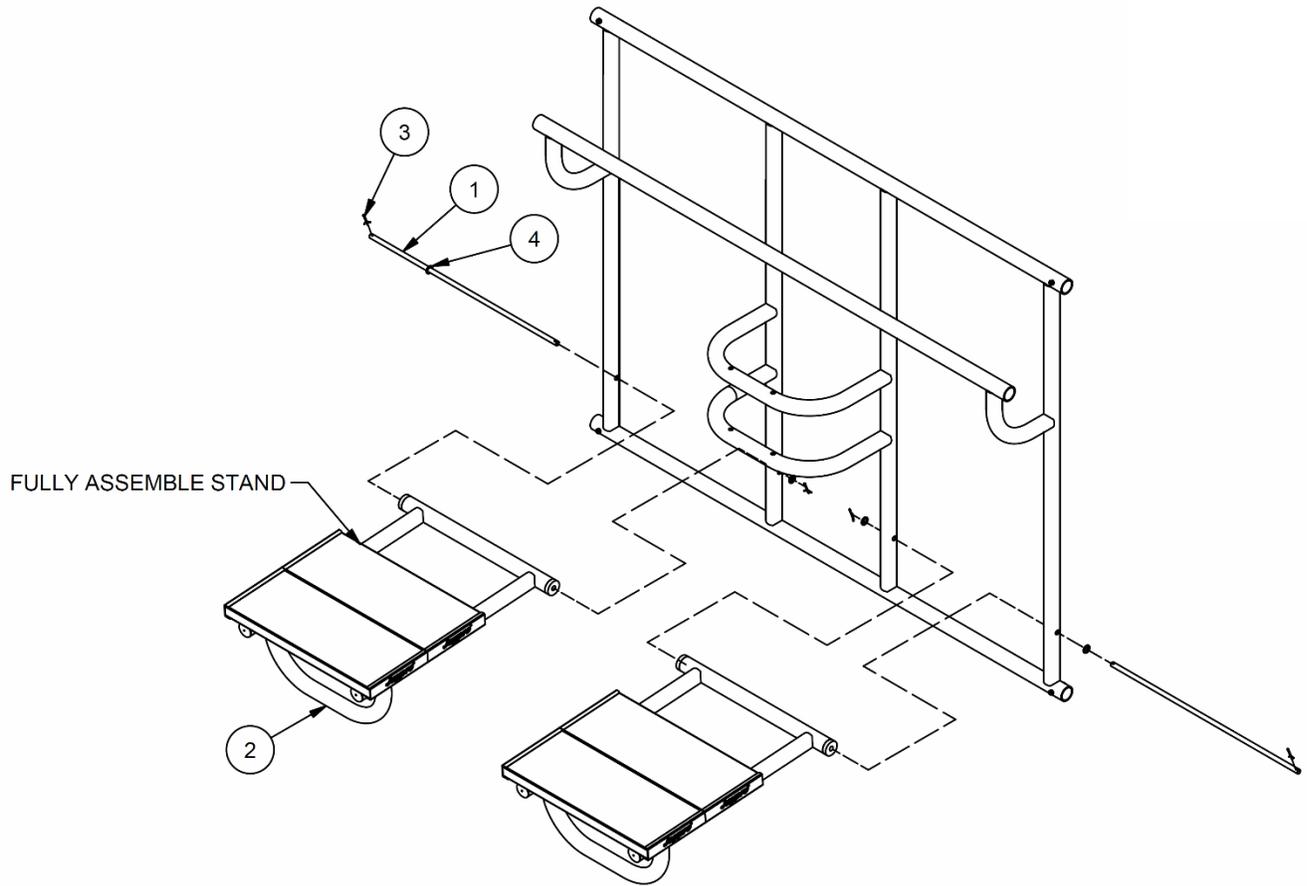

TYP FOR BOTH ENDS

Parts List		
ITEM	QTY	DESCRIPTION
1	2	9/16" x 31" Shaft Stand
2	2	Coach Stand Weldment
3	4	1/8" OD x 1-1/2" Cotter
4	4	9/16" Flat Washer

MAINTENANCE INSTRUCTIONS

Conduct a thorough inspection of the cage annually looking for loose bolts and nuts. Due to normal vibration during play, fasteners may work themselves loose. Tighten adequately on a regular basis to prevent injury.

Apply a small amount of lithium grease to any moving parts, especially axles and wheels. If wheels have zirk fittings, you may inject grease into wheel bearings using a commercially available grease gun.

Inspect net and padding for wear; contact factory to arrange for replacements or servicing.

Paint retouching – any commercially available rust-preventive paint is acceptable for touching up chipped paint and areas of rust. Follow paint manufacturer's suggestions for proper application of paint & primer. (All steel parts provided are either galvanized and/or powder coated for extra protection but priming and painting should be adequate for proper maintenance of equipment after it leaves the factory.)

Storage: Unit can be stored outside but protect from the elements if possible. Batting cage is designed with climatized and weather resistant materials but will age over time. Aging is accelerated if exposed to the weather, especially in Northern regions where freezing is expected during winter months. If possible, as part of seasonal storage, store indoors (net can be removed if desired to extend the life of this item; see catalog or call number listed above if replacement net is needed).

For replacement parts, information, or questions, please call Jaypro Sports at 1-800-243-0533 or find us online at www.jaypro.com