ITS-300 COURT LAYOUT AND NET INSTALL

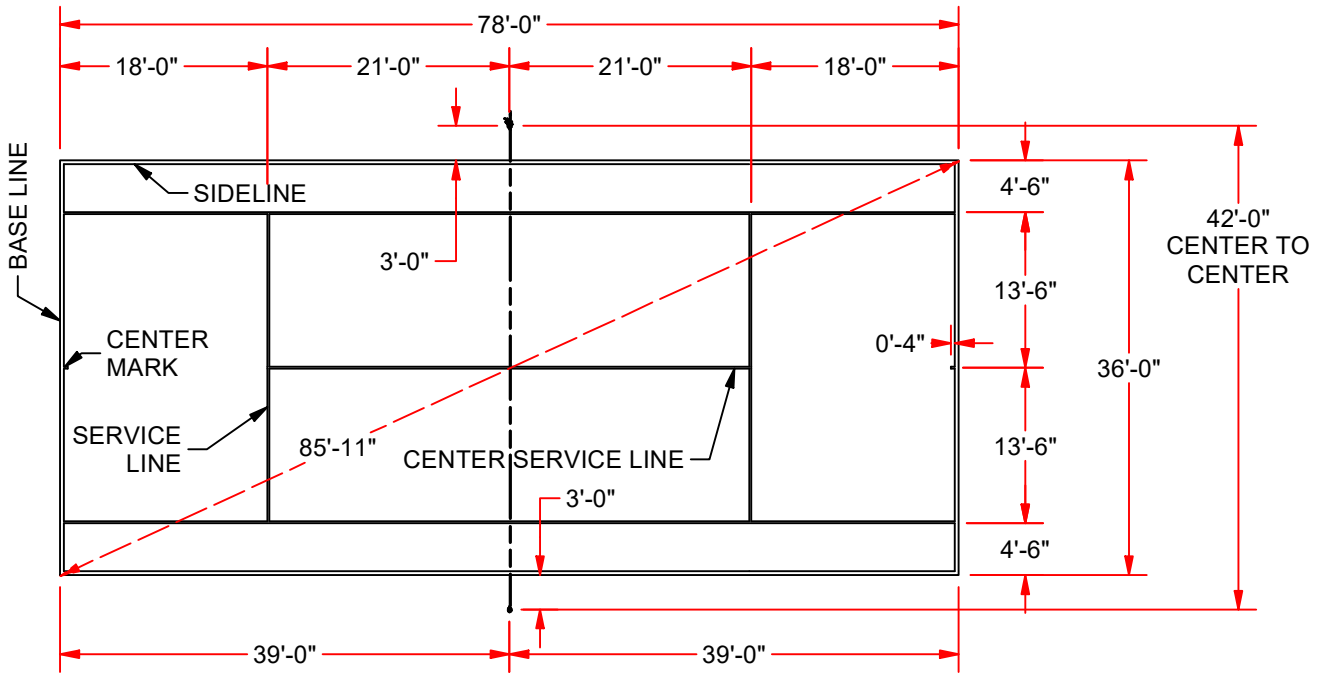

NOTES:
-ABOVE LAYOUT IS SUGGESTED FOR STANDARD TENNIS COURT. COURT LAYOUT AND POST LOCATION MAY VARY IF USING EXISTING FLOOR SLEEVES.
-DO NOT REFERENCE FOR PVB-70S FLOOR SLEEVE INSTALLATION INSTRUCTIONS. SEE PVB-70S INSTALLATION INSTRUCITONS.
-ALL DIMENSIONS ARE TO OUTSIDE EDGE OF LINES.
-CENTER SERVICE LINE & CENTER MARK SHALL BE 2 INCHES WIDE.
-OTHER LINES SHALL BE BETWEEN 1" AND 2" WIDE, EXCEPT THE BASELINES MAY BE UP TO 4" WIDE.

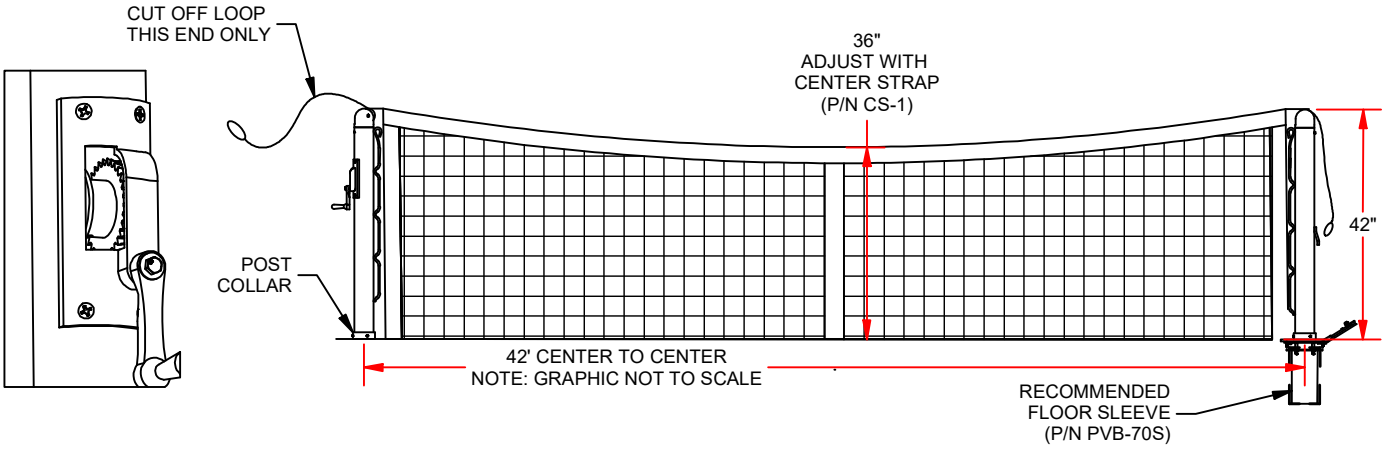

NET INSTALLATION:
1. ADJUST HEIGHT OF POSTS TO 42" WITH POST COLLARS.
2. CUT OFF LOOP AT ONE END OF TOP NET CABLE AND GUIDE OVER OVER PULLEY OF WINCH POST.
3. GUIDE CABLE INTO WINCH HOUSING AND INSERT THROUGH HOLE IN WINCH WHEEL.
4. ENSURE PULLEY WHEEL/CABLE TRACK AT TOP OF EACH POST IS IN LINE WITH NET CABLE. ADJUST TOP CAP SET SCREWS IF NECESSARY, PULLEY SHOULD BE ON WINCH SIDE OF POST.
5. ATTACH LOOP ON OTHER END OF NET CABLE TO HOOK ON OUTSIDE OF STATIC POST.
6. TURNING THE HANDLE CLOCKWISE, TIGHTEN CABLE SO CENTER OF NET IS APPROXIMATELY 39". DO NOT OVER TIGHTEN.
7. CENTER NET AND TIE OFF HEAD BAND ROPES AROUND EACH POST.
8. LACE NET SIDE BANDS TO POSTS USING BLACK LACING CORD THROUGH GROMMETS AND NET RAILS ON SIDES OF POSTS.
9. IF USING CENTER STRAP (CS-1) ADJUST HEIGHT AT CENTER TO 36".

NOTE: INSTALLATION INSTRUCTIONS AND GRAPHIC ARE FOR RECOMMENDED 42' TENNIS COURT LAYOUT AND NET. LAYOUT AND NET MAY VARY - TYPICAL RECREATION LAYOUT AND NET ARE 36' CENTER TO CENTER AND DO NOT INCLUDE CENTER STRAP.

jaypro sports

ITS-300

www.jayprosports.com / (800) 243-0533 / 976 Hartford Tpke, Waterford, CT 06385 USA
SUBJECT TO CHANGES IN DESIGN AND MANUFACTURING
© COPYRIGHT 2022 JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED