

## HD BATTING FRAME SPECIFICATIONS

### ITEM # - 1274639 - HD BATTING FRAME (4 SUPPORTS)

The HD Battering Frame is constructed of eight lower posts; eight corner elbows and four top cross bars that form four net supports.

**1) LOWER POST -**

Constructed of galvanized steel tube 3.5" O.D. x .095 wall thickness. The Lower Post has a 6.0" swage on the upper end of it to fit with the CORNER ELBOW. The Lower Post also has a 4 hole steel plate .375 x 8.0 x 8.0 for ground attachment.

**2) CORNER ELBOW -**

Constructed of galvanized steel tube 3.5" O.D. x .095 wall thickness.

**3) TOP CROSS BAR -**



Constructed of galvanized steel tube 3.5" O.D. x .095 wall thickness.

**4) HARDWARE -**

Grade - 5 Zinc Plated

**5) CABLES -**

Galvanized .187 Dia. 4200 lb. breaking strength.

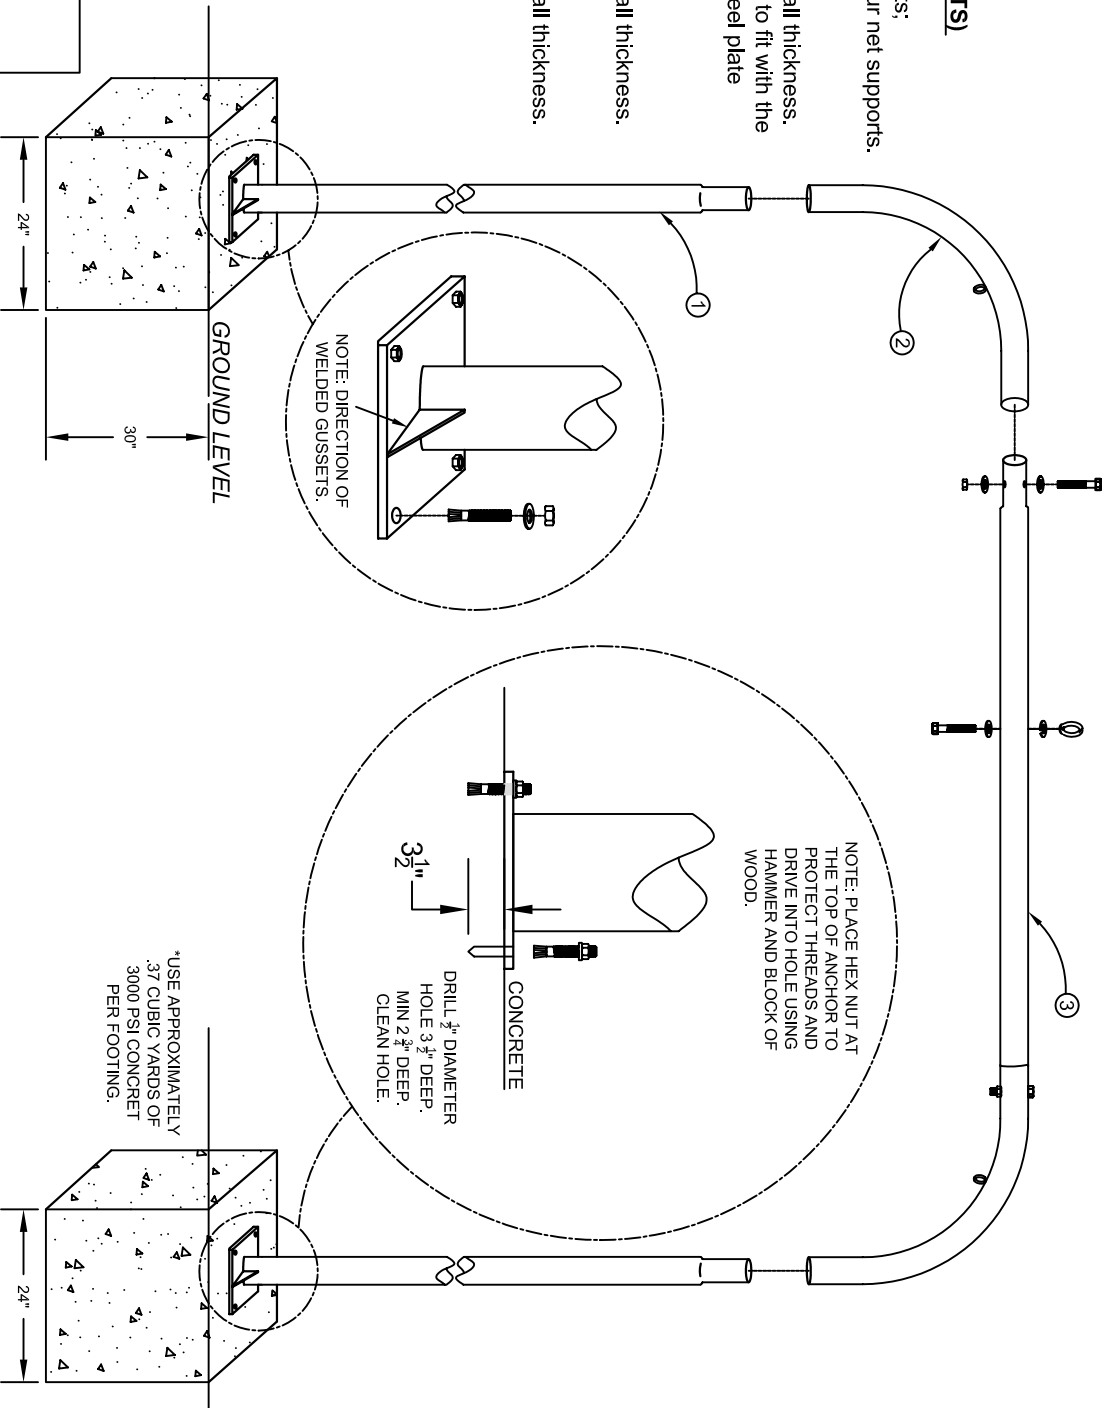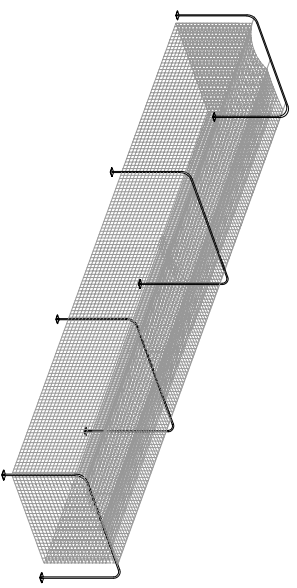

TOLERANCE		<b>BSN SPORTS</b>	
X = ±.030		1901 Diplomat Drive	
XX = ±.010		Farmers Branch, Texas 75234	
.XXX = ±.005		Z. OSORIO	
FRACTIONAL = ± 1/32		DRAWN	
UNLESS OTHERWISE NOTED		CHECKED	
REV	DATE	APPROVED	
TITLE		6/13	
HD BATTING FRAME			
SCALE	NUMBER		
NTS	1274639		